



CMDM 、 DWDM Power Meter

Ascentac OPM130&140

High Accuracy & Fast Speed for Simultaneously Checking Occupation & Quality of Multi-channel

Feature

- Quick response and high measurement accuracy
- Simultaneous & automatic measurement for multi- λ
- Results viewed in tabular and graphical mode
- Internal memory for 1000 test records
- 100 GHz or 200 GHz channel spacing supported

Application

- CWDM & DWDM system installation
- Trouble shooting on CWDM & DWDM systems
- Channel routing verification in ROADM networks



Description

Ascentac FiberGo OPM130 & 140 Series, CWDM / DWDM Power Meter, are specially designed for measuring both wavelength and absolute optical power of multi-wavelength in CWDM / DWDM system.

FiberGo OPM130 features fast scan of 18 calibrated wavelengths within 1 second. FiberGo OPM140 features fast scan of 40 calibrated wavelengths within 10 seconds with high measuring precision.

The series allows users to set threshold values for optical power. Test data can be stored and displayed in table or bar graph. It is an ideal tool to check the signal transmission performance in fiber optic network.


Appearance

- 1 Power status indicator
- 2 Laser-on indicator
- 3 One-touch automatic measurement
Intuitive interface for easy use
- 4 Shatter-resistant sleeve
- 5 Outdoor-enhanced 4.3 inch TFT
color LCD with backlight function
(Comfortable to read display for any
abominable environments)
- 6 A stand for hands-free
- 7 Dust cap for protecting optical
interface
 - a. Visual fault locator
 - b. Optical power meter
 - c. USB-A / USB-C
 - d. Ethernet



Measurement Data & Result Shown in Table & Bar Chart

Data and results are clear at a glance for quickly keeping track of the status of fiber-optic links.


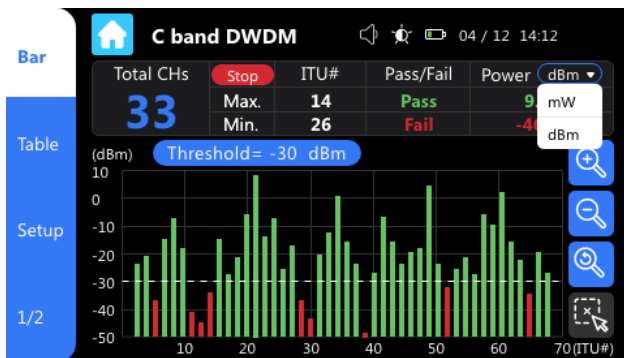


The screenshot shows the 'C band DWDM' interface with a table of measurement data. The table has columns for ITU#, ITU f (THz), Peak f (THz), Curr. dBm, and Max./Min. dBm. The data is as follows:

ITU#	ITU f (THz)	Peak f (THz)	Curr. dBm	Max./Min. dBm
1	191.200	191.200	2.07	2.06/1.06
2	191.300	191.300	-5.18	-5.20/1.06
3	191.400	191.400	9.54	9.51/1.06
4	191.600	191.600	-3.68	-3.71/1.06
5	191.800	191.800	-31.95	-31.98/1.06


Built-in Visual Fault Locator

Diagnosing simple fiber link problems like fiber damages or breaks, improperly attached fiber connectors, bending, and so forth.

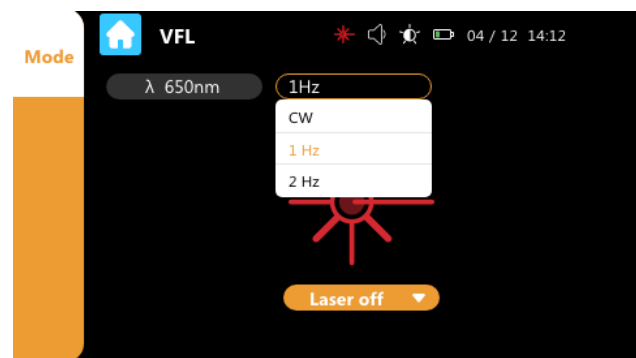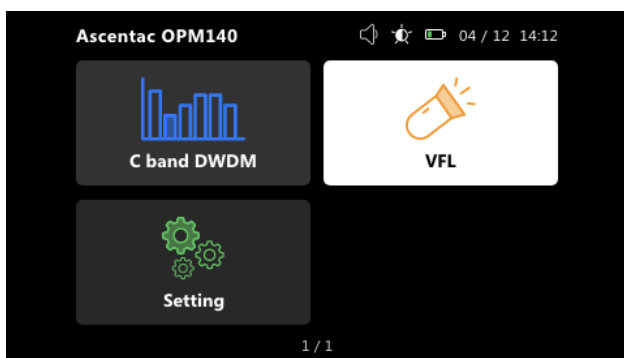


Application

Measuring, monitoring and storing the optical power value of multi-channel from both BBU and AAU side

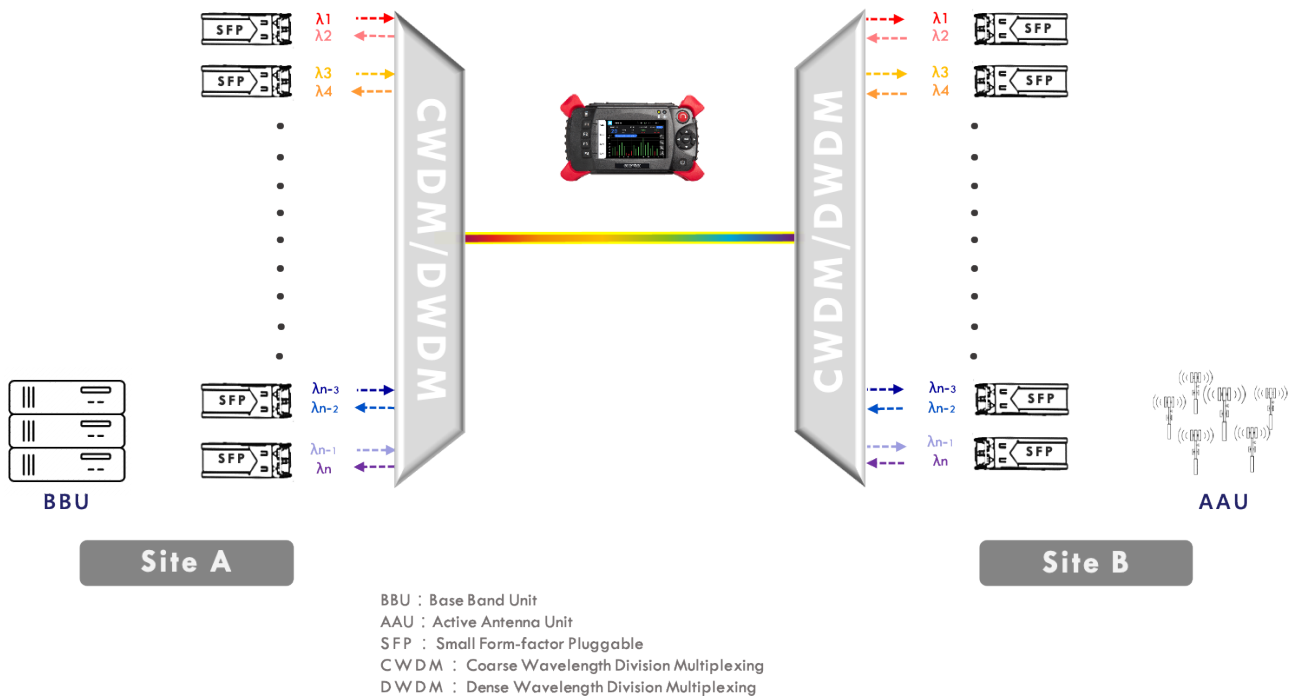

When to Use Built-in VFL in OPM130 / 140

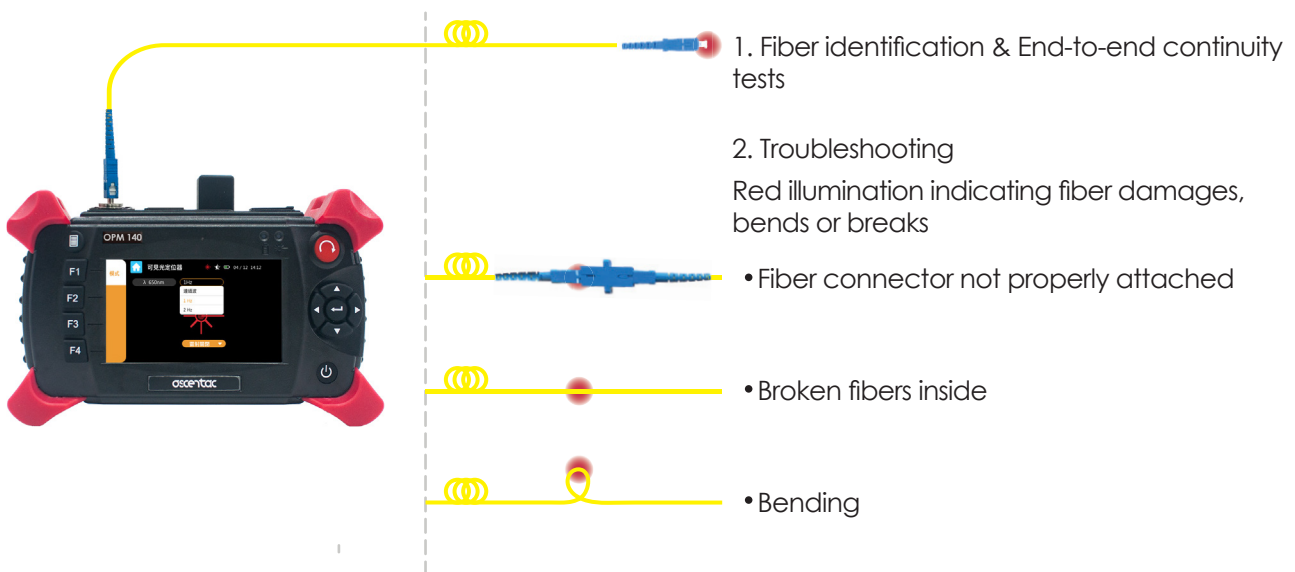

Specification

CWDM DWDM Power Meter Specification

Model	CWDM	C-band DWDM
Wavelength Range (nm)	1271 to 1611	1527.99 to 1564.68
Channel Spacing	20nm	100GHz ~ 200GHz
Power Range (dBm)	+10 to -50	
Maximum Input Power (dBm)	+27	
Resolution (dB)	0.01	
Accuracy (dB)	± 0.5	± 1.0
Return Loss (dB)	40	30
Measurement Speed (sec)	1	10 (Typical, scanning for all channels)
Optical Connector	SC/UPC	

VFL Specification

Wavelength (nm)	650 ± 10 (Visible)
Output Power (mW)	1
Modulation Output	CW(Continuous Wavelength), 1Hz, 2Hz
Distance (km)	5
Optical Connector	通用接口 2.5mm

Display

4.3 inch ultra-bright TFT color touch LCD with backlight function

Power Supply

Battery Capacity (mAh)	≥ 13360
Battery Life (hours)(with backlight)	≥ 8
Stand-by Time (month)	≥ 10
DC Input Voltage(V/Amp)	5V / 3A

Environment

Working Temperature (° C)	0 to +50
Storage Temperature (° C)	-10 to +60
Relative Humidity (%)	5 to 95, Non-condensing

Dimensions and Weight

Size (H x W x D) (mm)	133.01 x 202.7 x 70.43
Weight (g) (batteries included)	920

Others


Interface	1. Type-A USB 2. Type-C USB 3. RJ45 LAN port
-----------	--

Standard Accessories


Main unit, Adaptor cleaning sticks (2.5mm) 10pcs, Carrying bag, Shoulder strap, Built-in lithium battery, USB Power Adapter, USB Cable, One-year warranty.



Ordering Information

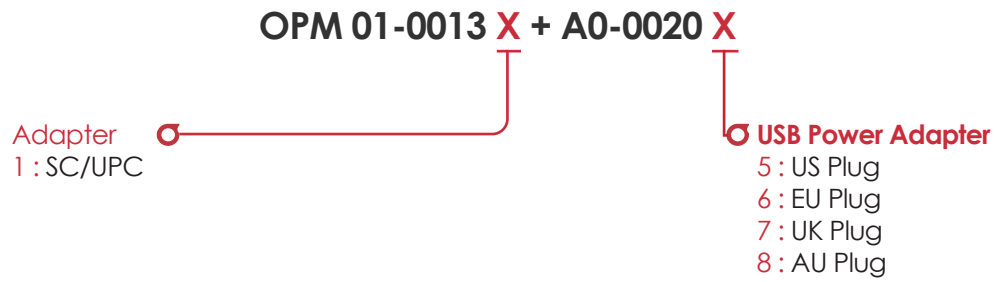

Note : 1. Wavelength range: 1271nm to 1611nm.
2. Incl. Visual Fault Locator (VFL) with output power 1mW and universal 2.5mm tip sleeve.

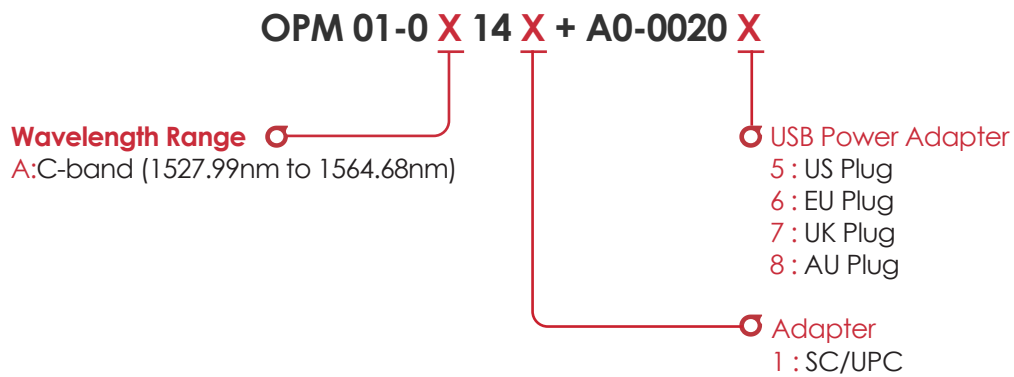

Note : 1. Incl. Visual Fault Locator (VFL) with output power 1mW and universal 2.5mm tip sleeve.

Option

USB Power Adapter

A0-00205	USB Power Adapter, US Plug
A0-00206	USB Power Adapter, EU Plug
A0-00207	USB Power Adapter, UK Plug
A0-00208	USB Power Adapter, AU Plug

USB Cable

A0-00305	USB-A to USB-C
----------	----------------

Adapter Cleaning Sticks - 100 pcs/box

02-0A110	1.25mm without ESD (Electro-Static Discharge)
02-0A120	2.5mm without ESD (Electro-Static Discharge)
02-0B110	1.25mm with ESD (Electro-Static Discharge)
02-0B120	2.5mm with ESD (Electro-Static Discharge)

Fiber Cleaner - 400 wipes/pc

02-00411	Reusable Fiber Cleaner--1 slot
02-00412	Reusable Fiber Cleaner--2 slots
02-00421	Cartridge--1 slot
02-00422	Cartridge--2 slots

Example : OPM 01-00131

Option : A0-00205 、 A0-00305



© Copyright 2026 Ascentac. All rights reserved. The information in this document is subject to change without notice.

For the latest information regarding this product, please visit our website at <http://www.ascentac.com>



Contact us